



Dial Up Config & Connecting Instructions with Graphics

Dial Up Config & Connecting

Below are the Basic Manual Configurations Connecting to the Internet for the following operating systems:

Windows 2000


Windows XP

Macintosh OS 8.5-9.2


Macintosh OS X

Windows 2000 - This article includes instructions for configuring a manual dial-up connection in Windows 2000. If the Web-ster Internet connection is unavailable, then double-click the **Make New Connection** icon and follow the steps in the wizard to create a connection.

1. Double-click the **My Computer** icon.
2. Double-click the **Control Panel** icon.
3. Double-click the **Network and Dial-Up Connections** icon.
4. Right-click the **Web-ster Internet** connection.
5. From the menu, click **Properties**.

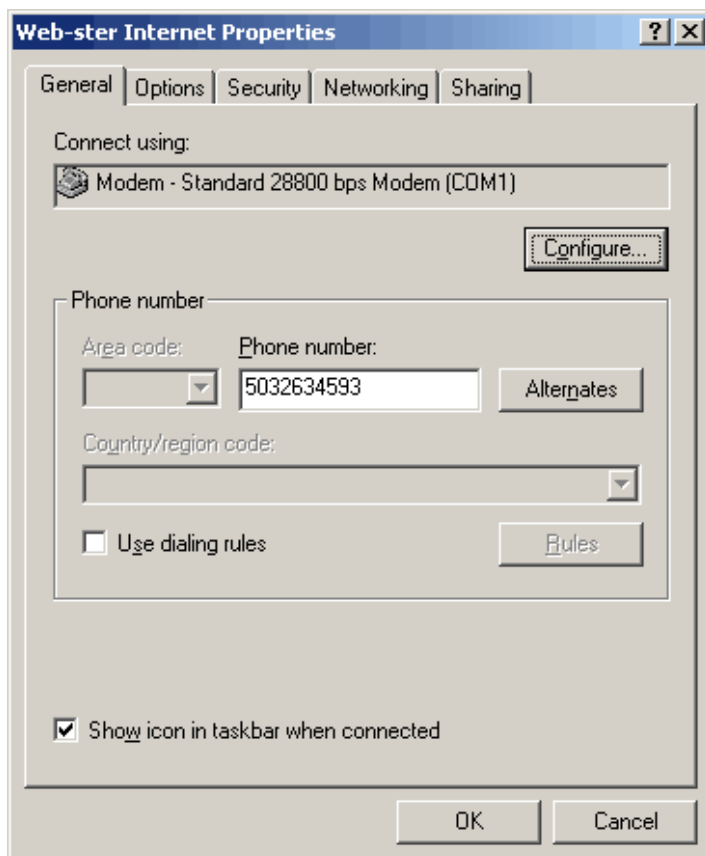


6. Make sure the phone number is correct for your area. (Check the number for your area at the bottom of the page.)
7. Make sure that the **Use dialing rules** box is unchecked.

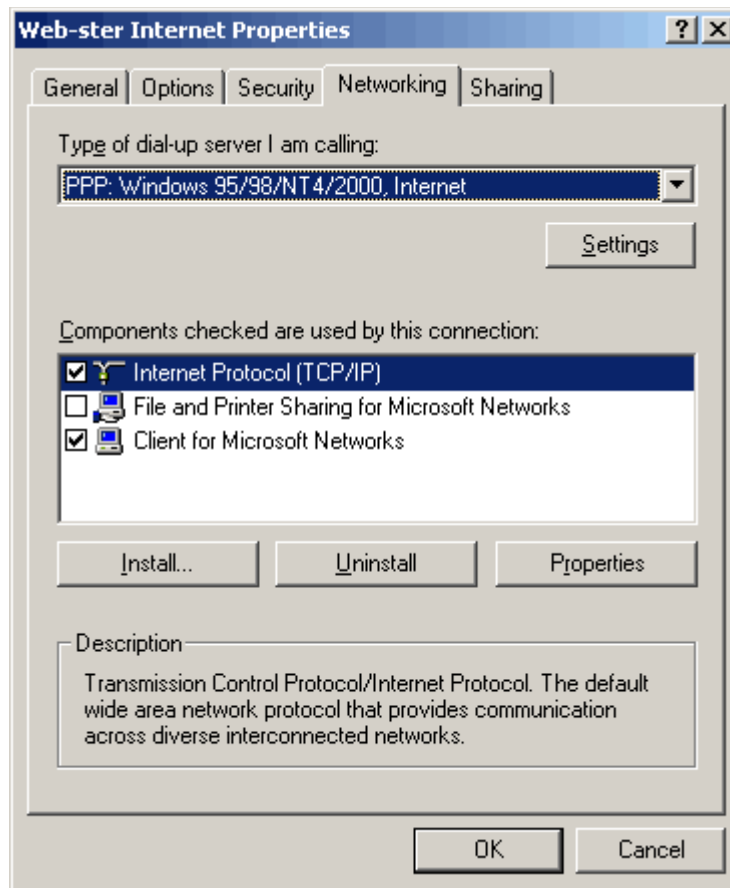

8. Click the **Networking** tab.
9. In the **Components checked are used by this connection:** list, make sure that **Client for Microsoft Networks and Internet Protocol (TCP/IP)** are displayed, and that a checkmark is placed in the box next to both of these entries.

10. Double-click **Internet Protocol (TCP/IP)**.

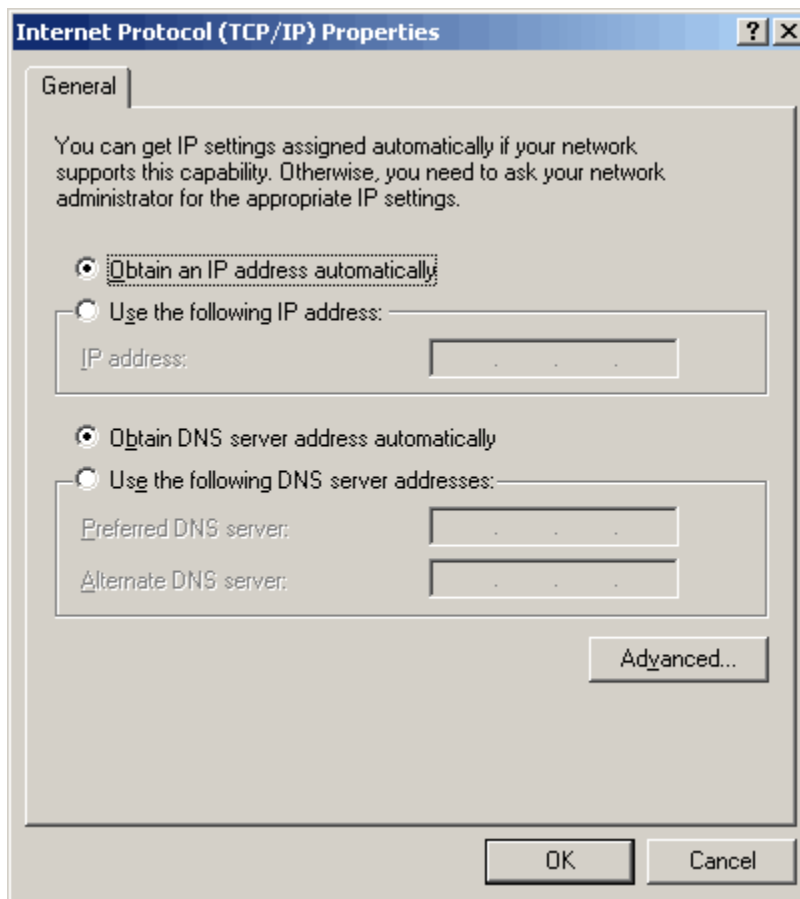


11. Click the **Server Assigned IP Address** option.
12. Click the **Server Assigned Name Server** option.
13. Click the **OK** button.
14. Click the OK button again.
15. Close the **Network and Dial-up Connections** screen.
16. Double-click the **Internet Explorer** icon.
17. From the **Dial-up Connection** screen, make sure the correct username and password are entered.
18. Click the **Dial** button.
19. Congratulations! Windows 2000 should now be dialed in to Web-ster Internet.


Windows XP - This article includes instructions for configuring a manual dial-up connection in Windows XP.

1. Click the Start button.
2. Click the **Control Panel** icon.
3. Click **Network and Internet connections**. If you are in classic mode, then you will not see Network and Internet Connections. Instead, click the **Network Connections** icon and skip to step 5 (below).
4. Click the Network Connections icon near the bottom of the screen.
5. Right-click the **Web-ster Internet** icon.

- From the menu, click **Properties**.

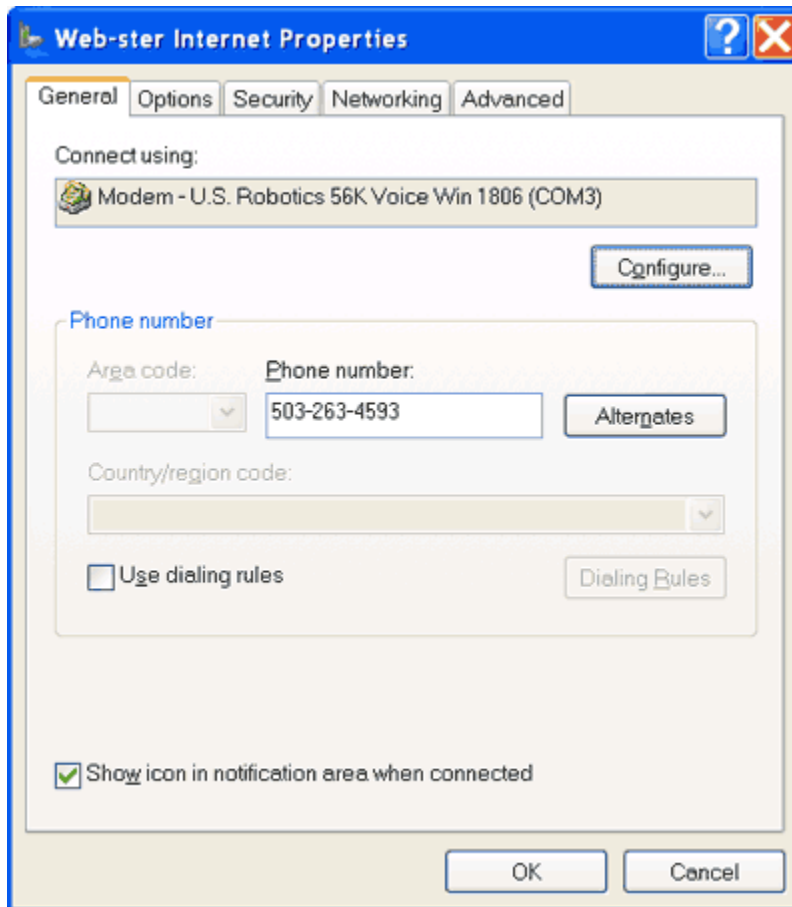


- Check to make sure the phone number is correct for your area.
- Make sure that the **Use dialing rules** box is unchecked.

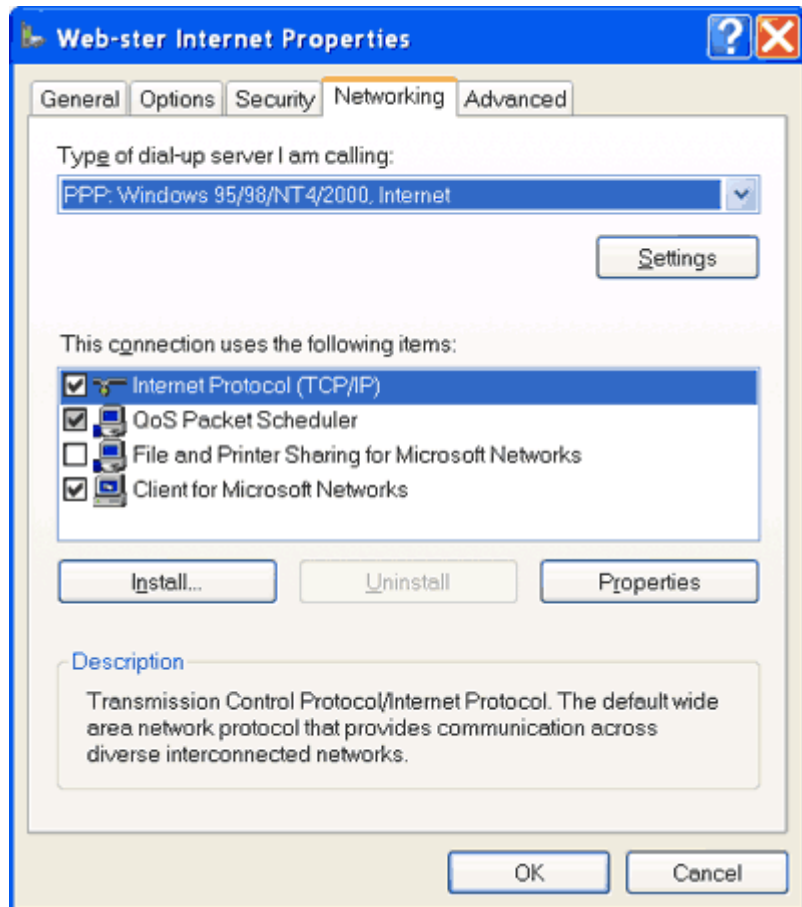

9. Click the **Networking** tab.
10. In the **This connection uses the following items:** list, make sure that both **Client for Microsoft Networks** and **Internet Protocol (TCP/IP)** are displayed, and make sure that the boxes next to both are checked.


11. Double-click **Internet Protocol (TCP/IP)**.

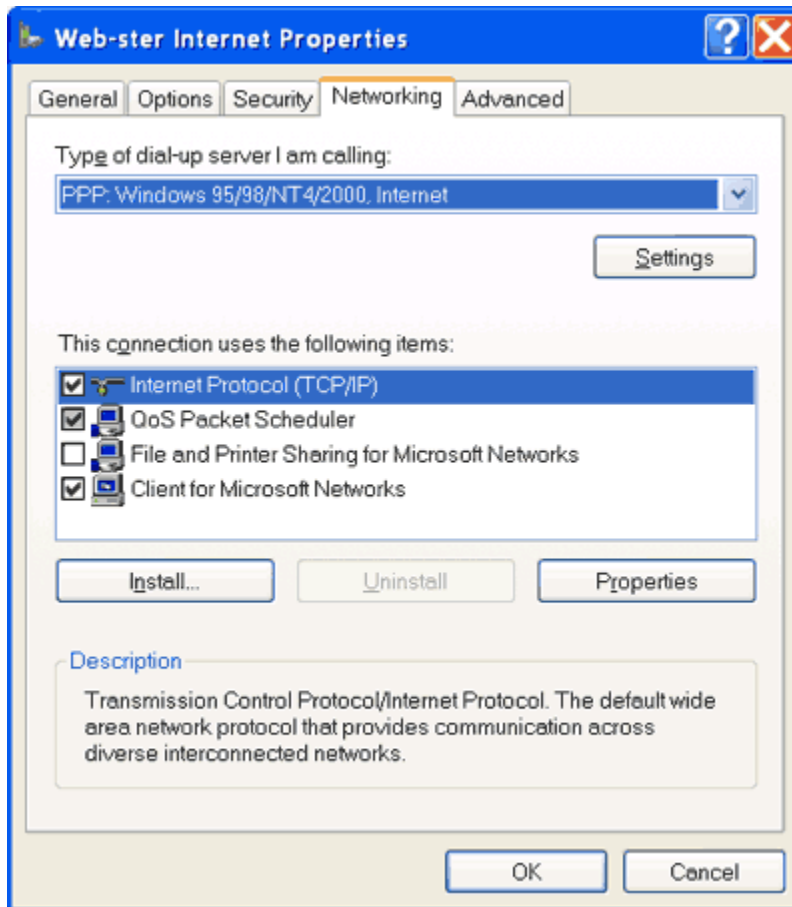


12. Click the **Obtain an IP address automatically** option.
13. Click the Obtain DNS server addresses automatically option.
14. Click the **OK** button.
15. Click the **OK** button again.
16. Close the **Network Connections** screen.
17. Click the **Start** button.
18. Click the **Internet Explorer** (or Internet) icon.
19. From the **Dial-up Connection** screen, make sure that the correct username and password are entered.
20. Click the **Dial** button.
21. 21. Congratulations! Windows XP should now be dialed in to Web-ster Internet.

Macintosh OS 8.5-9.2 - How to Set Up a Dial-Up Connection for Macintosh OS 8.5 - 9.x

1. Click the **Apple** menu.
2. Select **Control Panel**.

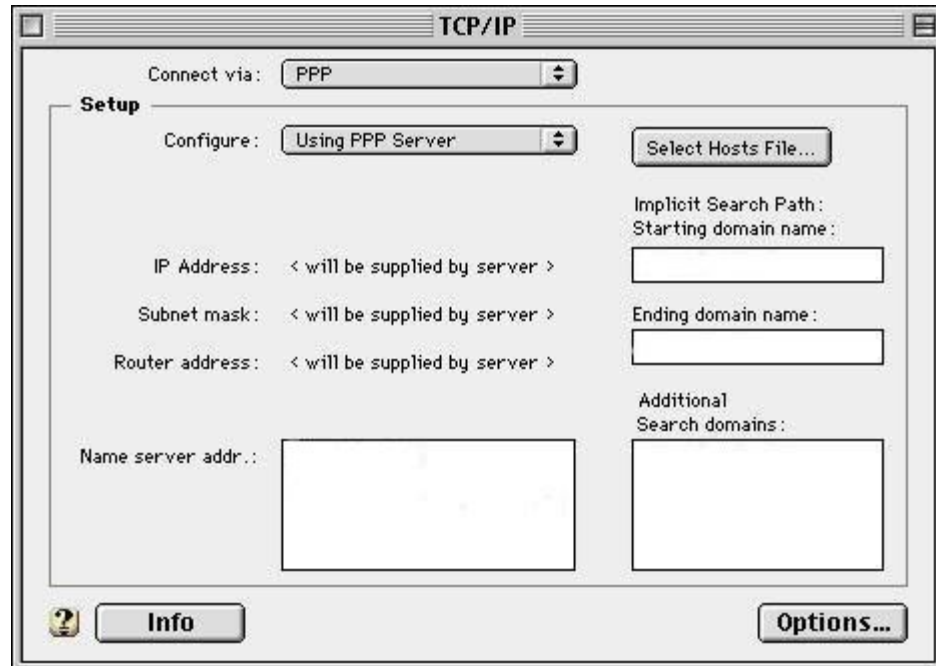


3. Click **TCP/IP**.
4. From the **Connect via:** drop-down menu, select **PPP**.
5. From the **Configure:** drop-down menu, select **Using PPP Server**.
6. Close the **TCP/IP** window. If necessary, save your changes.
7. Click the Apple menu.
8. Select **Control Panel**.
9. Mac OS 8.5 users: Click **PPP**. Mac OS 9.x users: Click **Remote Access**.

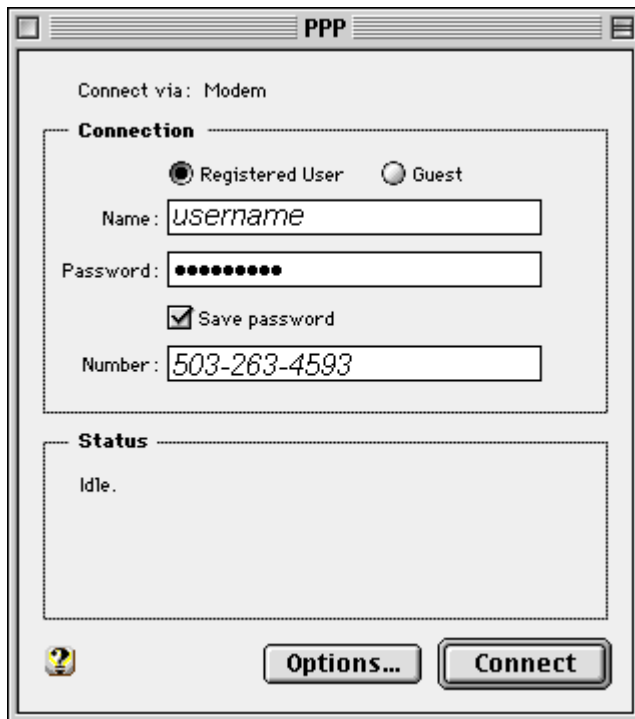

10. In the **Name** field, enter your username (in all lowercase letters).

11. In the **Password** field, enter your password.
12. In the **Number** field, enter the Web-ster Dial-up phone number: **503-263-4593**.
13. Click **Connect**.
14. The dial-up connection on your Macintosh should now be complete. You should now be able to open your browser and mail program, and both should connect and function properly. Your connection status should appear as follows:

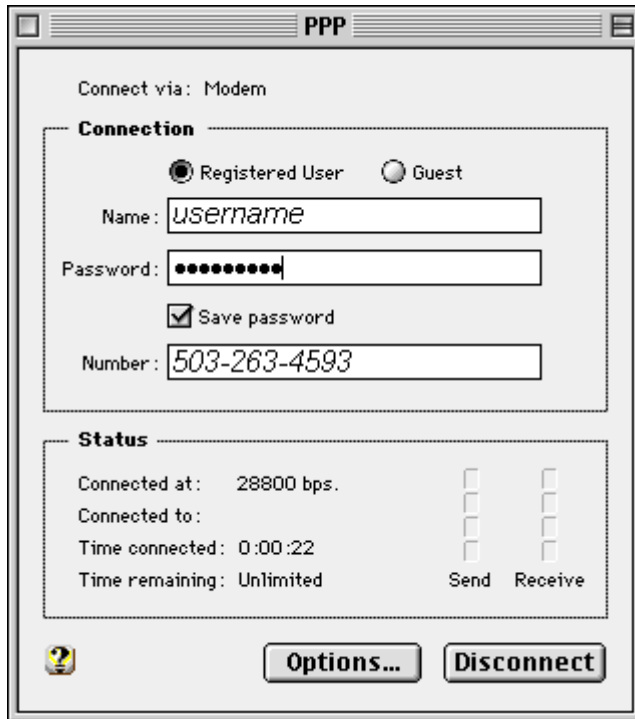

Macintosh OS X - How to Set Up a Dial-up Connection for Macintosh OS X

1. Click the **Apple** menu.
2. Select **System Preferences**.

3. Click the **Network** icon. A screen similar to the one shown below appears.

Note: If you are shown a screen that displays a built-in Ethernet and Internal Modem, double-click the **Internal Modem** option. Now it is necessary to change the settings with the correct Web-ster Internet information.

Network

Location: Automatic

Show: Internal Modem

PPP TCP/IP Proxies Modem

Service Provider: Web-ster (Optional)

Account Name: username

Password:

Telephone Number: 5032634593

Alternate Number: 5032636384 (Optional)

Save password
Checking this box allows all users of this computer to access this Internet account without entering a password.

PPP Options... Dial Now...

Click the lock to prevent further changes. Assist me... Apply Now

4. Make sure that the first two drop-down menus display the correct information: The Location menu should display **Automatic**, and the **Show** box should display **Internal Modem**.

Location: Automatic

Show: Internal Modem

5. In the **Service Provider** field, enter **Web-ster** or **Web-ster Internet**. (This reminds you which Internet service you are dialing when you connect to the Internet.)
6. In the **Account Name** field, enter the username you received from Web-ster Internet. The username is also the beginning part of your e-mail address. For example, in the e-mail address web-ster@web-ster.com, the username is **web-ster**.
7. In the **Password** field, enter the password you received from Web-ster. **Note:** Both username and password should be typed in all lowercase letters.

8. In the **Telephone Number** field, enter **503-263-4593**. (This is the primary phone number for Web-ster Internet dial-up service.)
9. In the **Alternate Number** field, enter **503-263-6384**. (This is the alternate telephone number for Web-ster Internet dial-up service.)
10. Recommended Option: You can set your dial-up connection to dial and connect whenever you open a program that uses the Internet. Web-ster recommends this setting because it makes using the Internet quicker and easier, since you don't have to connect before you open a program that uses the Internet. If you do not want to enable this option, skip to step 14.
11. Click the **PPP Options...** button near the bottom of the network screen.

Session Options:

- Connect automatically when needed
- Prompt every minutes to maintain connection
- Disconnect if idle for minutes
- Disconnect when user logs out
- Redial if busy
- Redial times
- Wait seconds before redialing


Advanced Options:

Terminal Script:

- Send PPP echo packets
- Use TCP header compression
- Connect using a terminal window (command line)
- Prompt for password after dialing
- Use verbose logging

12. At the top of the **PPP Options** screen, check the **Connect automatically when needed** box (as shown above).
13. Click the **OK** button.

14. Near the top of the network screen, click the **TCP/IP** button.

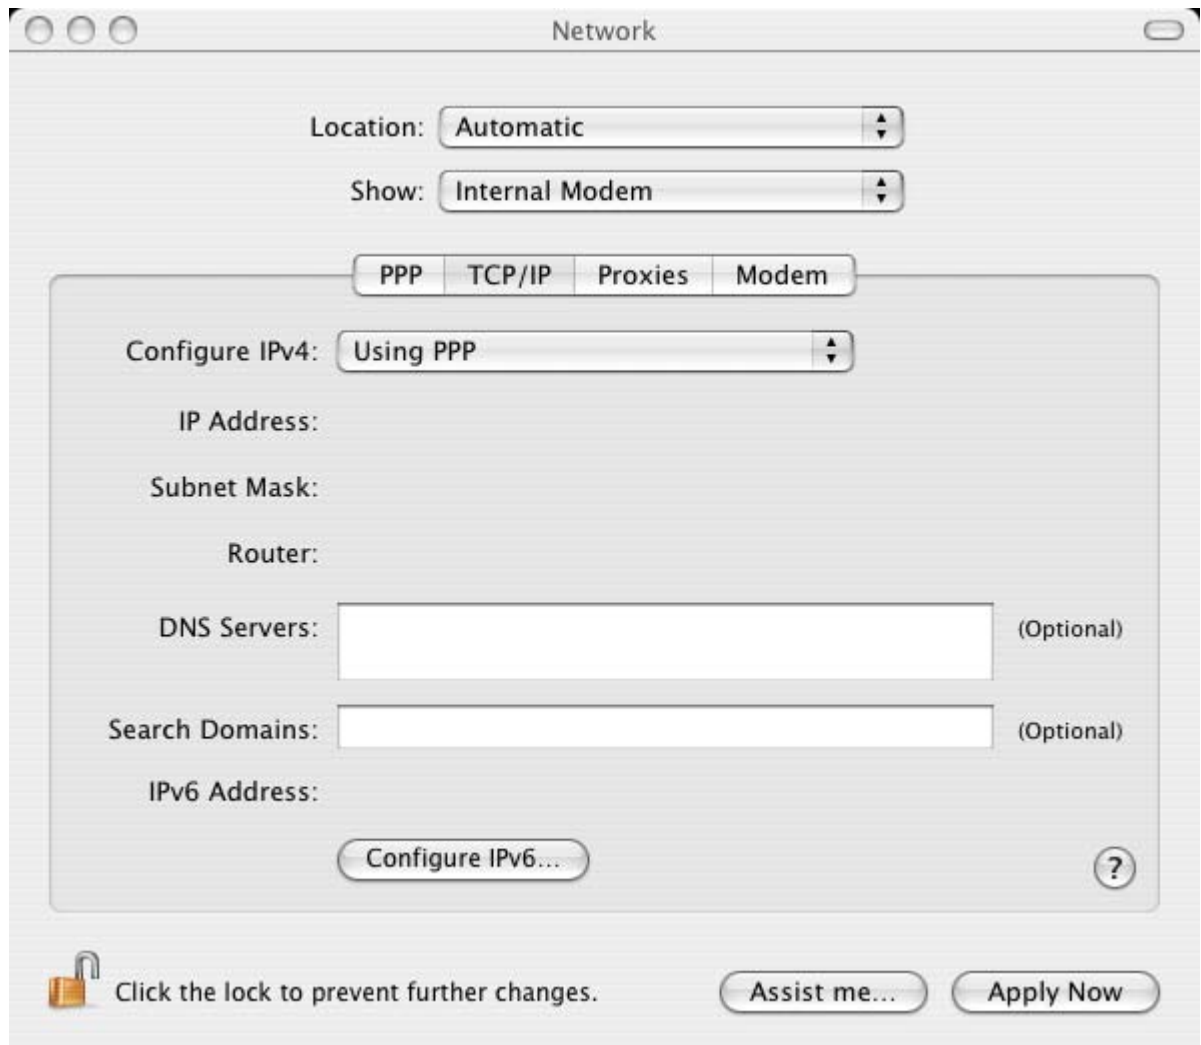

15. Make sure the **Configure IPv4** field displays **Using PPP**.
16. Click the **Apply Now** button.
17. In the upper left-hand corner of the screen, click the **red dot** to close the **Network** screen.
18. Save your changes.
19. Open your Web browser. Your Macintosh should dial and connect to Web-ster Internet. Note: If you did not check the **Connect automatically when needed** option, you may have to use the Internet Connect program located in your Utilities folder.

Congratulations! You have completed the steps required to connect to the Internet with your Mac OS X computer.